

Poly-Light Bag Filter/Strainer
Polypropylene - Light Duty

The Poly-Light Filter offers an economical and user friendly alternative to many liquid filtration applications with favourable operating cost benefits.

PL50 & PL75 housings are constructed from high impact polypropylene to be compatible with a wide range of fluids and its ergonomic screw down lid is designed for simple hand operation allowing for a quick filter changeover.

Bags Required



PL50 - 1 x 01 size filter bag (7" dia x 17" long)

PL75 - 1 x 02 size filter bag (7" dia x 32" long)

Strainer Baskets

Various Perforation & Mesh Sizes, Please contact our office for sizing options

Connections - 2" BSP Thread/Socket

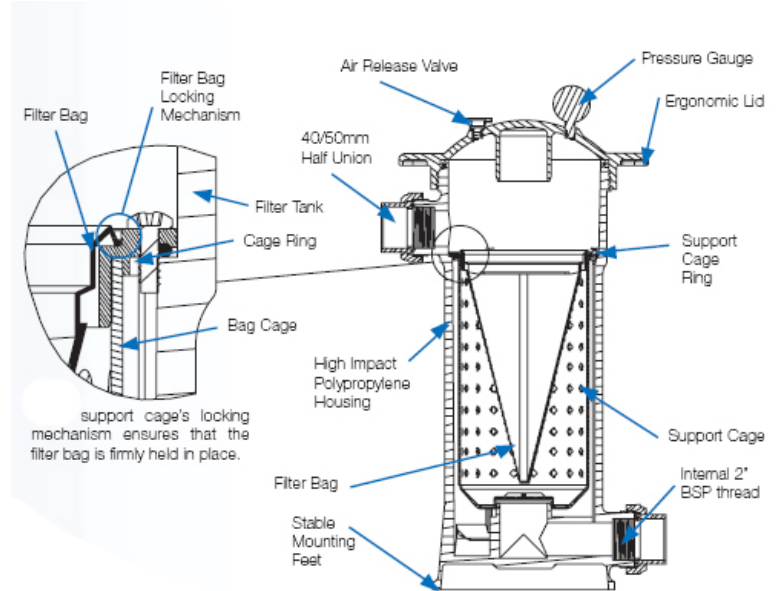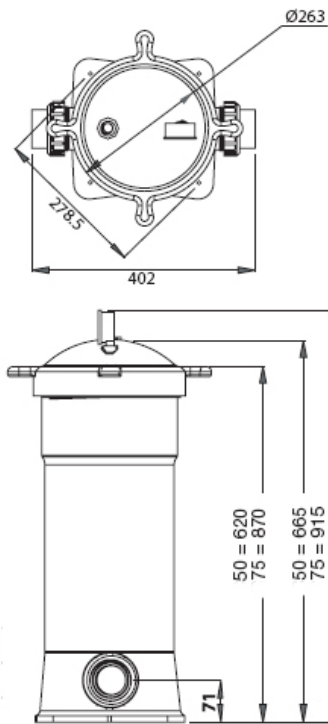

Specifications	PL50		PL75	
Max Flow Rate	190 lpm	50 gpm	270 lpm	70 gpm
Required clearance for servicing	530 mm	20.9"	770 mm	30.3"
Max pressure	600 KpA	87 psi	600kPa	87 psi
Max temperature	40°C	100°F	40°C	100°F