

ELF-G Filter housing

Accepts 25.4cm(10") / 50.8cm(20)

Double Open End Filter Cartridges


- Operating pressure up to 12 bar permits use in a wide range of applications
- Economical central post construction for quick change-out of DOE cartridges
- In-line inlet and outlet connections for easy installation
- Optional mounting brackets available

Specifications

Design Pressure	12 bar
Materials	Head SS304 , SS316L , Carbon Steel
	Bowl SS304 , SS316L , Carbon Steel
Connections	Inlet/Outlet 3/4" NPT
	Drain 1/4" NPT
Seal Materials	Buna, EPDM, Si.Rubber



Brisbane, Australia
www.monarchindustrial.com.au
www.monarchasiapacific.com.au

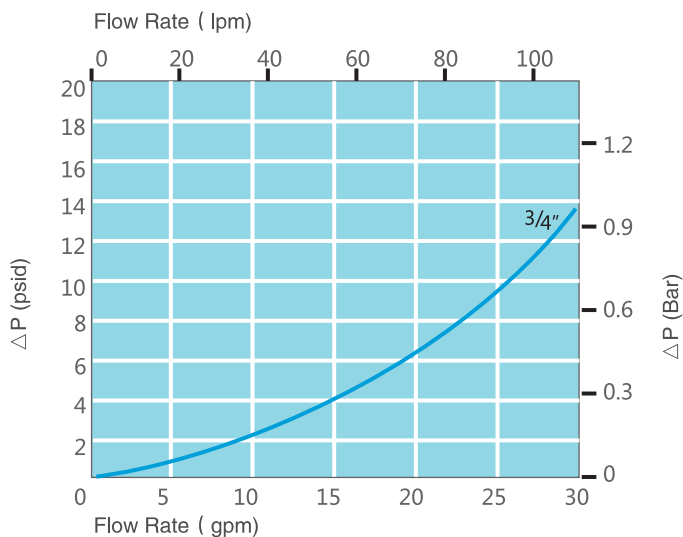

Application

- High price-performance ratio
- Simple structure
- Suitable for non-corrosive filter


ELF-G Filter housing

Dimensions


Model	Cartridge Length	L1 (mm)	L2 (mm)	Weight Empty (kg)
EGLCE10***	10	121	331	3.5
EGLCE20***	20	121	585	5.5

Cartridge Connection


7 – Double Open End

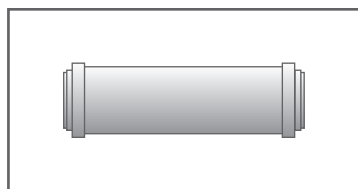

Optional Mounting Bracket

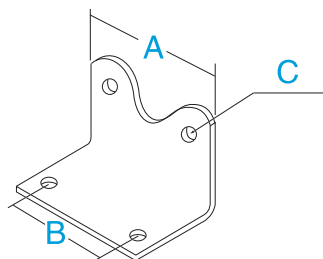

A (mm)	B (mm)	C (mm)
80	60	Ø8

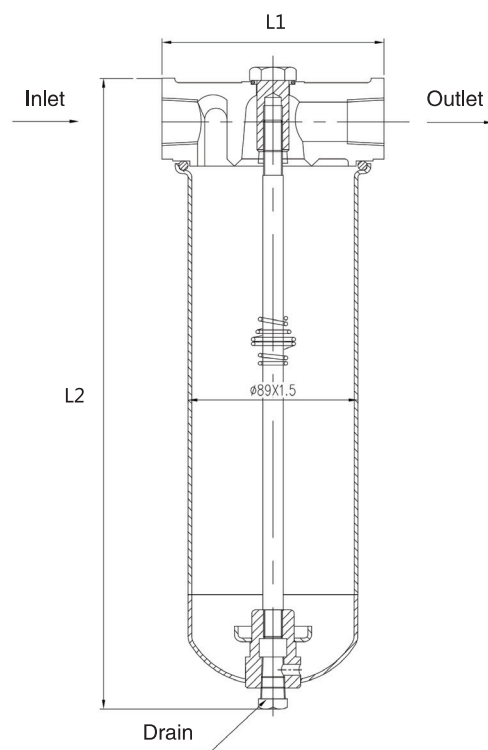

Code

EGLC	E	20	7	D	28	25	B
Model	Material	EL.Length	EL.Connection	Conn.Type	Press.Class	Inlet/Outlet Size	Seal Materials
G-G series	E – SS304 S – SS316L C – Carbon Steel	10 – 10" 20 – 20"	6 – 222 / Fin End 7 – DOE	N – NPT	12 – 12bar	19 – 3/4"	B – Buna E – EPDM S – Si . Rubber

e.g. EGLCE207N1219B

Brisbane, Australia
www.monarchindustrial.com.au
www.monarchasiapacific.com.au