



X TAPPING

14 DIA HOLE
IN FEET

1/8" BLEED SCREW

254

94

310 CTRS

158 CTRS

FLOW

HANDLE SWING

270


471

270.5


22

1/2" DRAIN

468

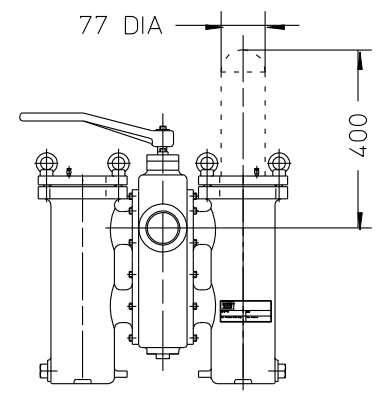

SPACE TO REMOVE ELEMENT



INFORMATION LABEL



WEIGHT OF FILTER

MAX WORKING PRESSURE

TEST PRESSURE

- 54 kg
- Limited by Material & flange rating
- 21 bar

ALL DIMENSIONS NOMINAL

UNLESS SPECIFIED GENERAL TOLERANCE 0 DEC PLACE +/- 1 1 DEC PLACE +/- 0.4 2 DEC PLACE +/- 1.0 ANGULAR +/- 2 Deg	APPROVED	MATERIAL	DESCRIPTION	
	DRAWN A.S.N.	OXFORD FILTRATION LIMITED	GENERAL ARRANGEMENT DN50 (2") Threaded Dual Filter	
MODIFICATION WT & V/DRAIN INFO. ADDED	DATE 9/12/13	C 2013 This drawing and the design is the property of OXFORD FILTRATION LIMITED and may not be copied or used for anypurpose other than that for which it was supplied unless expressly stated in writing		DRG NO. 12527
			ISS	4