

AR Series Air Release Valves

3/4" PVC OR CPVC BODY WITH PP BALL

KEY FEATURES

- PVC or CPVC Body with PP Ball
- Reliable Tank Air Venting
- Prevents Tank Overflow
- Hollow, Floating Ball Design
- Closes at 0 PSI
- FPM or EPDM Seals
- Standard Screen


MATERIALS

- PVC Cell Class 12454 per ASTM D1784
- CPVC Cell Class 23447 per ASTM D1784
- PP per ASTM D4101



TECHNICAL INFORMATION

CUTAWAY OF AIR RELEASE VALVE

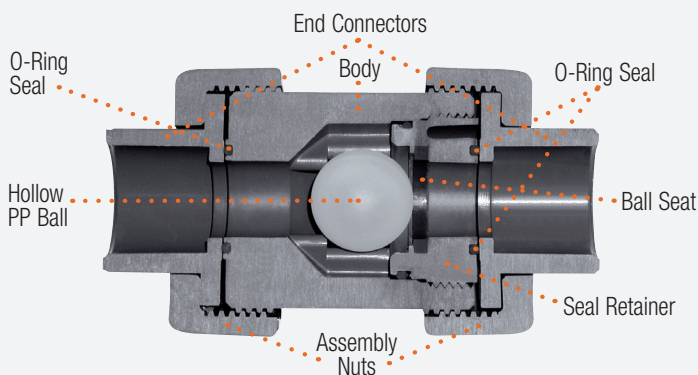

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
3/4" (DN20)	PVC/CPVC Body PP Ball	Socket and Threaded	FPM or EPDM	150 PSI @ 70°F Non-Shock

VENTING SPECIFICATIONS

One Air Release Valve will vent a tank with flows of up to 150 GPM (either in or out). For higher flow rates, use additional Air Release Valves.

Brisbane, Australia
www.monarchindustrial.com.au
www.monarchasiapacific.com.au

AR Series Air Release Valves

3/4" PVC BODY WITH PP BALL



Brisbane, Australia



www.monarchindustrial.com.au

www.monarchasiapacific.com.au

TECHNICAL INFORMATION, CONTINUED

PARTS LIST

1. Body
2. O-Ring Seals
3. Square Cut O-Ring Seat
4. Seal Retainer
5. End Connector
6. Union Nut

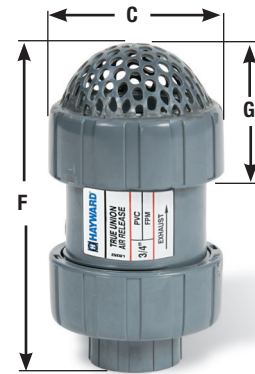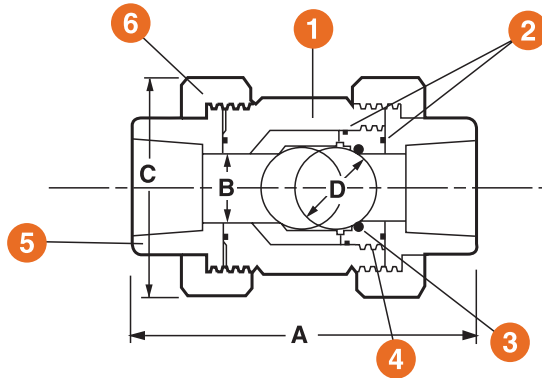


Screen installed

DIMENSIONS

SIZE in / DN	A in / mm	B in / mm	C in / mm	D in / mm	F in / mm	G in / mm	WEIGHT lbs / kg SOC / THD
3/4 / 20	4.75 / 121	0.75 / 19	2.63 / 67	1.00 / 25	5.0 / 127	2.60 / 66	.75 / .34

Dimensions are subject to change without notice – consult factory for installation information

OPERATING TEMPERATURE/PRESSURE

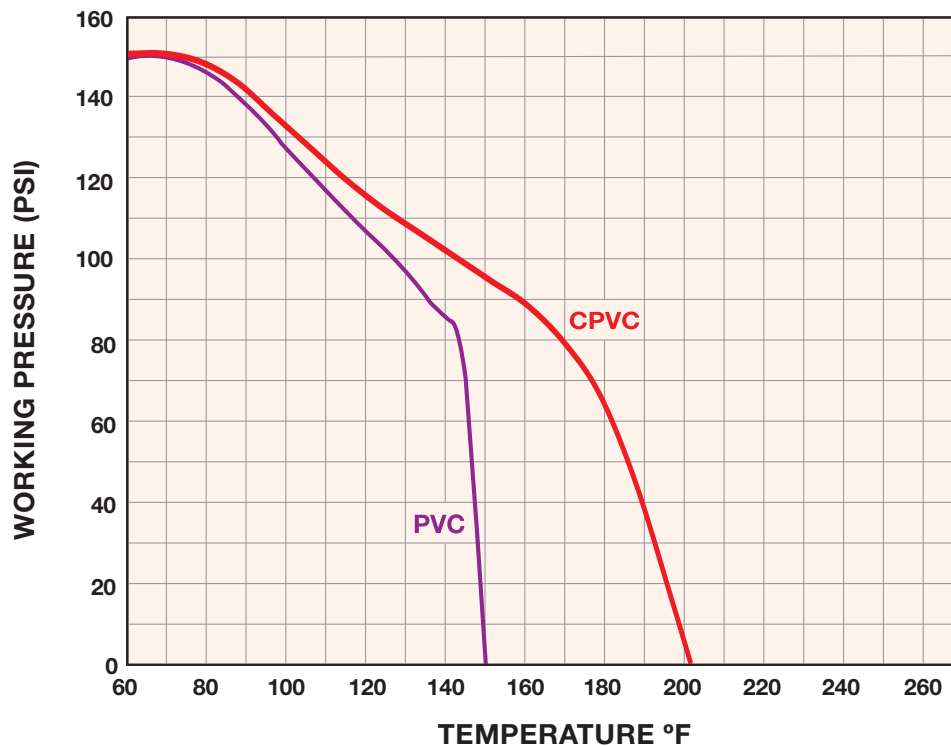

Hayward is a registered trademark of Hayward Industries, Inc. © 2018 Hayward Industries, Inc.